




IRONING LINE

COD. BF023/BF072


SUPER VAPOR

Steam generator for ironing

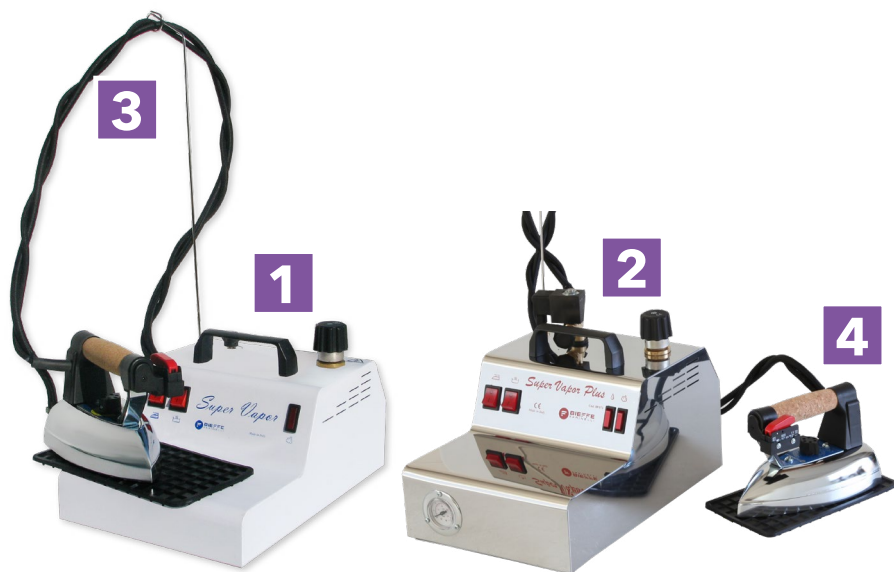


- 1 HANDLE
- 2 SAFETY VALVE
- 3 CORD HOLDING ROD
- 4 PROFESSIONAL IRON

SUPER VAPOR AVAILABLE IN 5 COLOURS

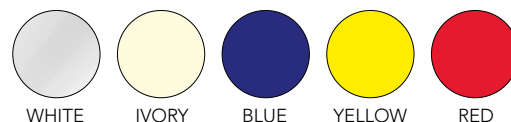

SUPER VAPOR PLUS AVAILABLE IN 2 COLOURS



TECHNICAL DATA

	BF023	BF072/BF073
POWER	220V-240V 50-60Hz	220V-240V 50-60Hz
BOILER CAPACITY	2 lt	2,4 lt
BOILER POWER	900W	900W
STEAM PRESSURE	3 Bar	3 Bar
BOILER REFILL	MANUAL	MANUAL
IRON POWER	850W	850W
DIMENSIONS	24,5x36,5x18,5h cm	24,5x36,5x22 cm
WEIGHT	6 kg	6,5 kg

AVAILABLE VERSIONS

BF023BE "SUPER VAPOR"	900W 220V-240V, 2 lt boiler, Bieffe iron 1,5 KG. Colours available WHITE, IVORY, BLUE, YELLOW, RED.
BF072BE "SUPER VAPOR PLUS"	900W 220V-240V, 2,4 lt boiler, Bieffe iron 1,5 KG. Colour WHITE.
BF073BE "SUPER VAPOR PLUS"	900W 220V-240V, 2,4 lt boiler, Bieffe iron 1,5 KG. Colour INOX.

AVAILABLE ACCESSORIES




KITF002
Bieffe iron 1,7 kg
w/ilme plug



AR9
Iron cleanser stick




AR14
Armored teflon base



SIMPLE TEFLON SHOE
1,5 kg **AR8**
1,7 kg **AR8G**



BORDERED TEFLON SHOE
1,5 kg **AR8S**
1,7 kg **AR8V**



ARMURED TEFLON SHOE
1,5 kg **AR8P**
1,7 kg **AR8C**



K2
Safedrop bottle



AR29
Iron cleanser paste



IRONING BOARDS
Vacuum, heated,
blowing

EFFICIENCY, SAFETY and NOTES

- ✓ RELIABILITY AND SAFETY are guaranteed by a COPPER BOILER. Copper is an explosion-proof and antiscaling material. The HEATERS are placed externally, so they NEVER come into contact with water.
- ✓ 1 KW power creates a steam flow equal to 1,2 kg/h (20 g/min). The efficiency of steam is proportional to its flow, not to its pressure. There is no point in having high pressure and a low flow.
- ✓ The whole production is based in Italy, in our plant in Pesaro.

SPARE PARTS AND SERVICE

- 🕒 BIEFFE guarantees the shipping of spare parts, accessories in very short times. Our efficient help line is available for service and assistance.
- ✉ For spare parts and service: info@bieffeitalia.it
- ➡ Visit our website: www.bieffeitalia.it